



POLIMASTER[®]
Radiation Detection Technologies



ELECTRONIC PERSONAL DOSIMETER

PoliSimeter™

PoliSimeter series of electronic personal dosimeters (EPDs) is a **next generation** of the well-known **PM1610 series** by Polimaster, which was a trusted solution on the market for nearly 15 years, with over 20,000 dosimeters sold. Building on the legacy of the PM1610, the PoliSimeter offers enhanced capabilities for extended measurement of **personal dose Hp(10)** and **dose rate $\dot{H}_p(10)$** of both continuous and pulsed X-ray and gamma radiation. The PoliSimeter is designed to meet the latest industry requirements and features a USB-C port for convenient connectivity and data transfer.

Equipped with shockproof rubberized case, a bright high-contrast display with LED backlight, and large, easy-to-press buttons PoliSimeter is designed for convenient use, even with protective gloves on.

PoliSimeter ER model has an **extended range** of dose measurement **up to 20 Sv** for use in high-radiation environments, providing critical safety and monitoring functionality.

Applications

- First responders
- Industrial facilities
- Police and security
- Nuclear power plants
- Healthcare professionals
- Customs and border control
- Anyone working under the risk of X-ray and gamma radiation exposure

Features


- Small and lightweight
- Shockproof hermetic case
- USB-C communication with PC
- Audible, visual and vibration alarms
- Simple navigation with two large buttons
- Measurement of pulsed photon radiation
- Wide dose and dose rate measurement ranges
- Long-life rechargeable battery: 500 hours



SPECIFICATIONS	
Detector	Geiger-Mueller tube
Types of radiation	X-ray and gamma radiation
Measurement quantities	Hp(10); Ĥp(10)
Dose measurement range	0.05 μSv to 10 Sv (up to 20 Sv for PoliSimeter ER)
Dose rate measurement range	0.1 μSv/h to 10 Sv/h
Energy range	20 keV to 10 MeV
Combined energy and angular response (Ref. ¹³⁷ Cs)	–29 % to +67 % (48 keV to 1.25 MeV; 0° to 60°) <i>IEC 61526:2024 compliant</i>
Accuracy (Ref. ¹³⁷ Cs at 300 μSv/h)	±5 %
Dose rate linearity (0.1 μSv/h to 1 Sv/h)	–13 % to +18 % <i>IEC 61526:2024 compliant</i>
Statistical fluctuations for dose and dose rate	<i>IEC 61526:2024 compliant</i>
Pulsed radiation	
– pulse width	>1 ms
– dose range	10 μSv to 10 Sv (up to 20 Sv for PoliSimeter ER)
Memory	7500 events
Alarms	visual, audible, vibration
Communication	USB-C
Power supply	built-in rechargeable battery
Battery lifetime	
(average dose rate < 0.3 μSv/h, active alarms < 20 s / 24 h)	500 hours (typical)
Ingress protection	IP65
Drop test	1 m (concrete surface)
Dimensions	≤ 58 × 58 × 20 mm
Weight	≤ 70 g
Operating conditions	
– ambient temperature	–20 °C to 50 °C
– atmospheric pressure	84 kPa to 106.7 kPa
– relative humidity	up to 98 % at 35 °C



Holder with a clip for secure fastening

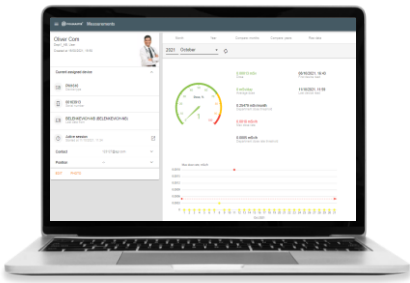

Compatible with
PoliRead® Automated Personal Dosimetry System

OPTIONAL
Factory calibration approved under LST EN ISO/IEC 17025:2018 (LA NAB accreditation certificate No. LA.225-02) is available upon request.

Polimaster Inc.
45645 Willowpond Plaza,
Suite 100, Sterling, VA,
20164, USA
phone: +1 703 525 5075
fax: +1 703 525 5079
info@polimaster.us

Polimaster Europe UAB
Ezero str. 4, Didziasalio k.,
Nemezio sen., LT-13264,
Vilnius district, Lithuania
phone: +370 5 210 2323
fax: +370 5 210 2324
info@polimaster.com

Polimaster Japan Co., Ltd.
AUBE2 5-177 Kuratsuki,
Kanazawa, Ishikawa Prefecture
920-8203 Japan
phone: + 81 076 201 8623
fax: + 81 076 201 8624
pacific@polimaster.jp